




Blue Shield Nitrile Gloves are 100% Nitrile with no plasticizers. They are powderfree, preventing powder related complications and sensitivity after usage. Blue Shield Nitrile Gloves are manufactured at high end ISO Certified facilities. They are ambidextrous and provide an excellent feel while donning.

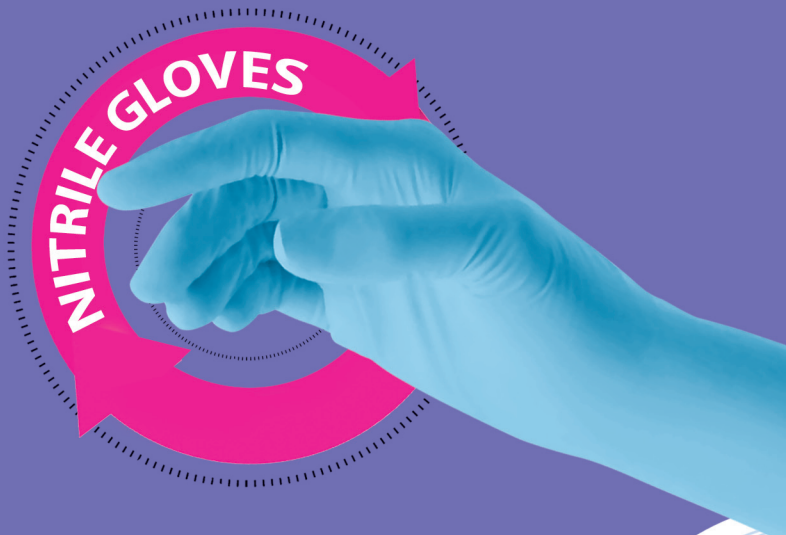

SALIENT FEATURES

- ▶ Improved tactile sensitivity
- ▶ Finger textured for enhanced grip
- ▶ Less than 2mg of particulate residue per glove
- ▶ Specially formulated to improve elasticity
- ▶ Beaded cuff for added strength and easier donning
- ▶ Gives great comfort to the wearer. Reduces finger fatigue.
- ▶ Free of natural rubber (latex). Reduces risk of Type 1 Allergies.



Nitrile Gloves

PRODUCT INFORMATION

Product Type	: Nitrile Gloves
Length	: 300mm / 400mm
Material	: 100% Nitrile Rubber
Colour	: Blue
Usage	: For Single Use Only
Design	: Ambidextrous, Textured, Beaded Cuff
Powder Free Residue	: Max 2mg/Glove (Typical:_0.2mg/Glove)

BLUE SHIELD NITRILE GLOVES ARE IDEAL FOR USE IN

- ▶ Chemical/Electronic Industries
- ▶ Laboratories/Pharmaceutical/Biotechnology industries
- ▶ Health Care Industries/Oncology Units
- ▶ Special Packing Industries

PAMIDI RSB GLOVE INDUSTRIES PVT LTD

H.No.2-22-236, Aruna Co-operative Society

Bhaghyanagar Colony, Kukatpally, HYDERABAD - 500 072

Tel: +91 78425 56674, Email ID: sales@pamidirsbgloves.com

Web: www.pamidirsbgloves.com



Nitrile Gloves

STANDARDS AND QUALITY ASSURANCE

300mm	400mm
EN 455 Part 1,2,3, ASTM D 412, ASTM D 573 ASTM D 3767, ASTM D 5151, ASTM D 6319, AQL 1.5 QUALITY SYSTEM STANDARD ISO 2859 SINGLE SAMPLING PLAN	EN 455-1,2 ASTM D 5151, ASTM D 6124, ASTM D 6319 AQL 1.5 QUALITY SYSTEM STANDARD ISO 2859 SINGLE SAMPLING PLAN

PRODUCTS

SIZE	PRODUCT CODE	PALM SIZE			DESIGN	STERILIZATION
300mm	NS 300	S	M	L	AMBIDEXTROUS	STERILE
300mm	NNS 300	S	M	L	AMBIDEXTROUS	NON-STERILE
400mm	NS 400	S	M	L	AMBIDEXTROUS	STERILE
400mm	NNS 400	S	M	L	AMBIDEXTROUS	NON-STERILE

PHYSICAL DIMENSIONS

SIZE	400mm	300mm
LENGTH	400 mm (Min)	300 ± 5mm
THICKNESS FINGER	0.23mm (Min)	0.15mm (Min)
THICKNESS PALM	0.18mm (Min)	0.10mm (Min)
PALM WIDTH SMALL	85 ± 5mm	85 ± 5mm
PALM WIDTH MEDIUM	95 ± 5mm	95 ± 5mm
PALM WIDTH LARGE	105 ± 5mm	108 ± 5mm

PHYSICAL PROPERTIES

Size	Method	Tensile Strength	Force at Break
300mm / 400mm	Before Aging	14.0 MPa (min)	6.0 N (min)
	After Aging	14.0 MPa (min)	6.0 N (min)

STATISTICAL INSPECTION

300mm / 400mm			
Criteria	Sampling Plan	Inspection Level	AQL
Pinholes	ISO 2859 Single	G1	1.5
Major Defects	ISO 2859 Single	G1	2.5
Minor Defects	ISO 2859 Single	G1	4.0
Phys Dimensions	ISO 2859 Single	S - 2	4.0
Phys Properties	ISO 2859 Single	S - 2	4.0